



Love of life begins here, with Rcom products

BIRD BROODER.90

Nebulizer type

MX-BL500N



Product name	[Nebulizer Type] BIRD BROODER 90
Manufacturer	AUTOELEX
Brand	Rcom
Model	MX-BL500N
Origin	MADE IN KOREA



Ranked TOP!!

Credit evaluation in the global incubators market

By FACT. MR, research agency in Ireland



Rcom Bird Brooder

Innovative Digital Technology



AUTOELEX's very own technology-concentrated exclusive brooder for birds.

Rcom BIRD BROODER provides an appropriate environment for companion birds and newborn birds in need of treatment by improved device safety and durability through a centralized heating method.

It's a Brooder for daylife, but can be used as a Intensive Care Recovery Room when the bird is sick.



* The hanger picture are for illustration purpose only and are not included with this product.

Automatic Temperature & Humidity control

(Independent humidity system, which is easy to use and manage)

Rcom BIRD BROODER, incubation technology carefully checks and adjusts the set temperature and humidity.

AI alert function helps easily check the condition by notifying you when insufficient of water.

* Temperature control range : Ambient temperature ~ 38°C(100°F)

Humidity control range : 40 ~ 60% (It can be change according to the conditions)

* If the temperature and humidity of the brooding room (the place where the brooder is installed) is higher than the brooder, the temperature and humidity cannot be lowered. / This product does not have cooling and dehumidification functions.



Large FND display

Easy-to-use menu options, enable optimal environment setting according to the health condition of animal patient.



Nebulizer and Oxygen tank can be connected and used separately or simultaneously

A dedicated hose connector is included which can connect to a nebulizer, oxygen tank.



* The Oxygen tank and nebulizer picture are for illustration purpose only and are not included with this product.

Connect Nebulizer



Connect Oxygen tank



Connect Nebulizer and Oxygen tank





Rotatable sliding door and drawer-separated tray

The sliding door helps to check the condition of the birds easily and the drawer-separately tray helps to manage hygiene conveniently.



Clean Air-filter

Built-in air filter prevents dust and impurities.
It can be used several times with dense filter material and it easy to clean water.

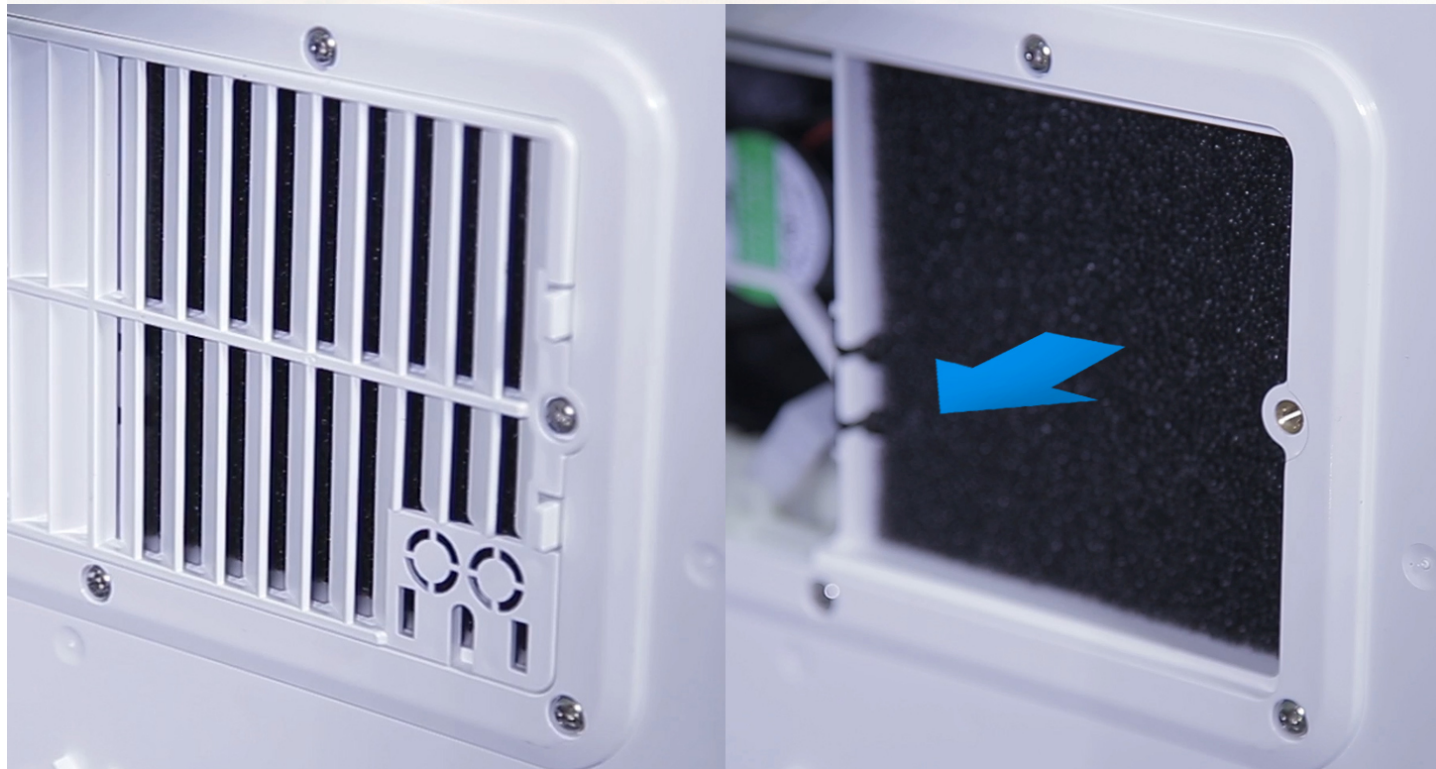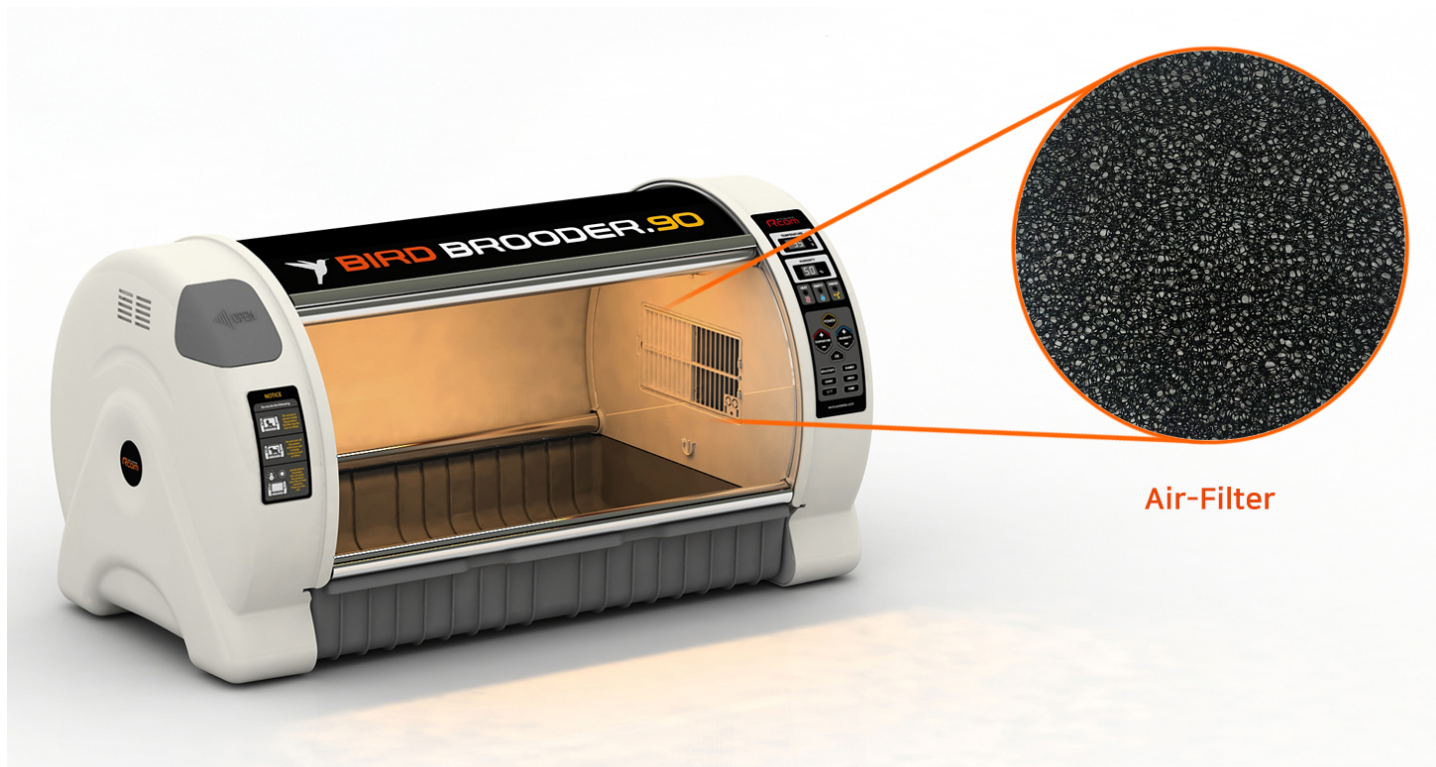

ANION function

The anion function provides refreshing effect.



LED lighting

The LED's lighting brightness can be adjusted in 5 levels.



Low noise, Low power

The internal fan noise has reduced to 1/5 compared to former model, provides comfortable indoor environments and reduces power consumption by up to 40%.



Low
Noise /
Low
Power



Build rack helps stable double-stacking

It helps increasing the space efficiency by double stacking the Rcom BIRD BROODER using the combination device Build Rack.

* Build Rack - Option



Secondary tray



A secondary tray equipped to create a compartment or grow newborn birds.

* Secondary tray - Option



Rcom BRID BROODER size

Rcom BIRD BROODER has two different sizes.

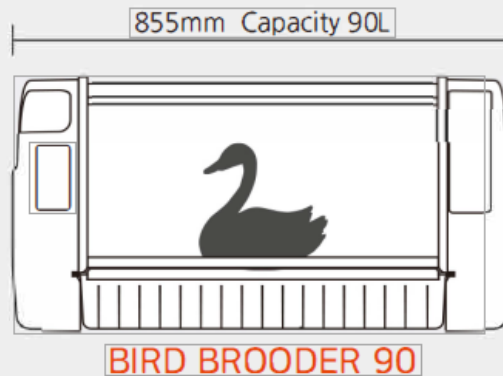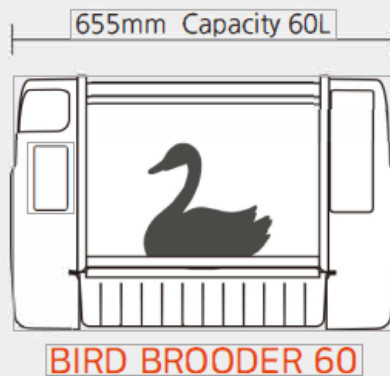

You can control the optimum conditions according to the state of bird health.

Classify	Normal use	In case of sickness
Temperature	OFF ~ 32°C / OFF ~ 89°F	25 ~ 36°C / 77 ~ 96°F
Humidity	OFF ~ 50%	50 ~ 60%
Anion	ON or OFF	ON or OFF
Other options	-	Nebulizer / Oxygen Tank

* It can be different according to the species of birds.



SPECIFICATION

Name	Rcom BIRD BROODER 90
Model NO.	MX-BL500, MX-BL500(N)
Temp. Control	Ambient temperatuer ~ 38°C / ~ 100°F
External environment temp.	Optimum range 20 ~ 25°C / 68 ~ 77°F
Humi. Control	40 ~ 60% (It can be changed according to the conditions)
External environment humi.	40 ~ 60%
Display	FND
Power	AC 100-120V, 50/60Hz / AC 220-240V, 50/60Hz
Power consumption	Average 90W
Size	(W)855 x (L)470 x (H)440mm / Capacity 90L
Weight	10kg(N.W.) / 14.5kg(G.W)
Fuse	250V 10.0A (Ø5*20mm)

* This product does not have cooling and dehumidification functions.
If the temperature and humidity of the brooding room (the place where the brooder is installed) is higher than the brooder, the temperature and humidity cannot be lowered.

BASIC PRODUCT INFORMATION

Manufacturer	AUTOELEX CO., LTD.
Country of manufacture	KOREA

* You will be asking for service charge if you are in below cases.
- Broken or Problem caused by 'No cleaning' or 'Improper handling'
- Broken or problem caused by 'Not using distilled water'
- Broken or problem caused by 'Wrong controlling(Using)'
- Broken or Problem caused by using the machine out of User's Manual.
- Broken or problem caused by 'Customer's mistake or fault'

* Successful brooding depends on many numbers of factors. Neither Autoelex (Rcom) nor its global distributors and vendors can be held responsible for loss of life or property damage caused by user neglect, alteration, modification or painting, change of use or power failure. To avoid errors, mishaps and danger, carefully check this User Manual before initial use. Also please check the manual regularly to ensure your operation of the machine is correct.

AUTHORISED DISTRIBUTOR



- OFFICE : 1066, Civil Lines, Station Road
Jhansi, U.P-284001, INDIA
- Contact : +91-9559777053
- E-MAIL : thepetsnation@gmail.com
info@petsnation.in
- Website : www.petsnation.in

CLICK ON DISTRIBUTOR TO CONTACT ON WHATSAPP