







Product name REPTILE BROODER 90

Manufacturer AUTOELEX

Brand Rcom

Model MX-BL700R

Origin MADE IN KOREA



Credit evaluation in the global incubators market

By FACT. MR, research agency in Ireland








AUTOELEX's very own technology-concentrated exclusive brooder for Reptiles.

Rcom REPTILE BROODER provides an appropriate environment for reptiles in need of treatment by improved device safety and durability through a centralized heating method.

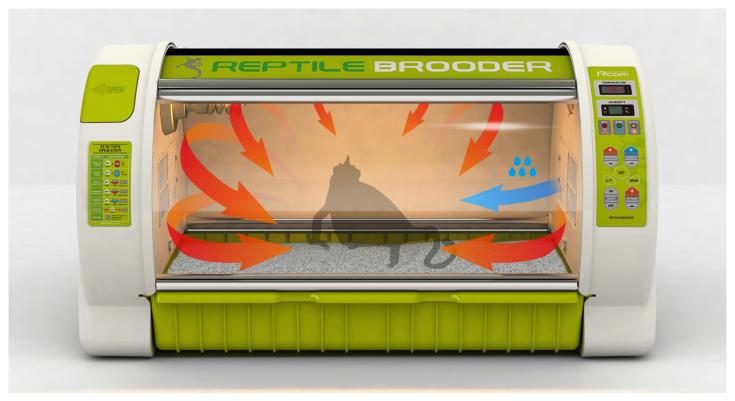



^{*} The vermiculite picture are for illustration purpose only and are not included with this product.



Clean Air-filter

Built-in air filter prevents dust and impurities. It can be used several times with dense filter material and it easy to clean water.

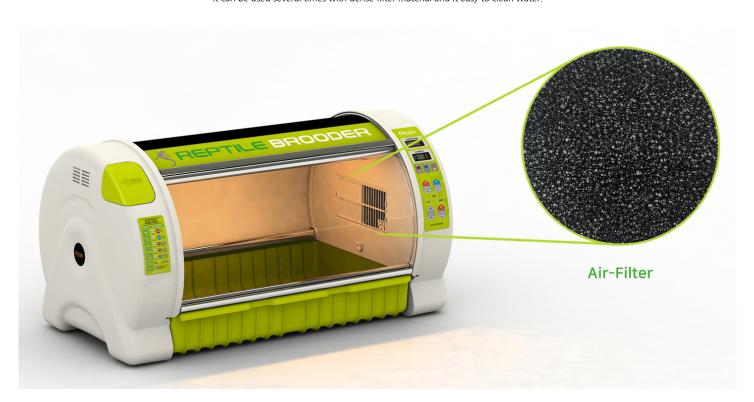


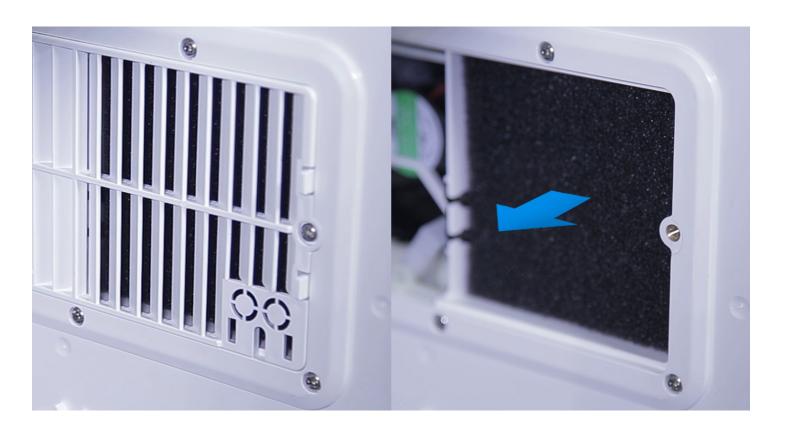



Large FND display

Easy-to-use menu options, enable optimal environment setting according to the health condition of reptile.

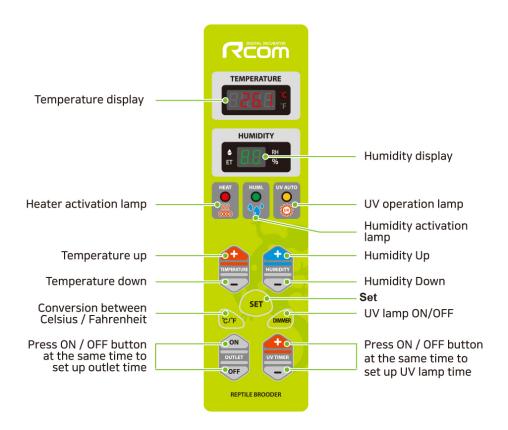

Reptile exclusive UV lamp

It has a built-in UV lamp that provides UV light to reptiles.

UV lamp can be set time.





Rotatable sliding door and drawer-separated tray

The sliding door helps to check the condition of the reptile easily and the drawer-separately tray helps to manage hygiene conveniently.



Automatic Temperature & Humidity control

(Independent humidity system, which is easy to use and manage)

Rcom REPTILE BROODER, incubation technology carefully checks and adjusts the set temperature and humidity.

Al alert function helps easily check the condition by notifying you when insufficient of water.

* Temperature control range : Ambient temperature $\sim 38^{\circ}C(100^{\circ}F)$ Humidity control range : 40 $\sim 60\%$ (It can be change according to the conditions)

* If the temperature and humidity of the brooding room (the place where the brooder is installed) is higher than the brooder, the temperature and humidity cannot be lowered. / This product does not have cooling and dehumidification functions.





LED lighting

You can check the inside with LED lights.



Built-in outlet

There is an outlet inside, so you can use auxiliary equipment.





Low noise, Low power

The internal fan noise has reduced to 1/5 compared to former model, provides comfortable indoor environments and reduces power consumption by up to 40%.



Build rack helps stable double-stacking

It helps increasing the space efficiency by double stacking the Rcom BIRD BROODER using the combination device Build Rack.

* Build Rack - Option




Rcom REPTILE BROODER size



Rcom REPTILE BROODER has two different sizes.







SPECIFICATION

Name Rcom REPTILE BROODER Big

MX-BL700R Model NO.

Temp, Control External environment temp. Optimum range 20 ~ 25℃ / 68 ~ 77°F

Humi, Control $40 \sim 60\%$ (It can be changed according to the conditions)

40 ~ 60% External environment humi. Display FND

AC 100-120V, 50/60Hz / AC 220-240V, 50/60Hz Power

Power consumption

Size (W)855 x (L)470 x (H)440mm / Capacity 90L

10.7kg Weight

Fuse 250V 10.0A (Ø5*20mm)

Ambient temperatuer ~ 38°C / ~ 100°F

Manufacturer AUTOELEX CO., LTD.

KOREA Country of manufacture

BASIC PRODUCT INFORMATION

- * You will be asking for service charge if you are in below cases.
 Broken or Problem caused by 'No cleaning' or 'Improper handling'
 - Broken or problem caused by 'Not using distilled water
 - Broken or problem caused by 'Wrong controling(Using)'
 Broken or Problem caused by using the machine out of User's Manual.
 - Broken or problem caused by 'Customer's mistake or fault'

AUTHORISED DISTRIBUTOR



OFFICE: 1066, Civil Lines, Station Road

Jhansi, U.P-284001, INDIA

● Contact :+91-9559777053 ● E-MAIL : thepetsnation@gmail.com

info@petsnation.in Website : www.petsnation.in

^{*} Successful brooding depends on many numbers of factors. Neither Autoelex (Rcom) nor its global distributors and vendors can be held responsible for loss of life or property damage caused by user neglect, alteration, modification or painting, change of use or power failure. To avoid errors, mishaps and danger, carefully check this User Manual before initial use. Also please check the manual regularly to ensure your operation of the machine is correct.

^{*} This product does not have cooling and dehumidification functions. If the temperature and humidity of the brooding room (the place where the brooder is installed) is higher than the brooder, the temperature and humidity cannot be lowered.