





Product name Rcom REPTILE PRO 90

Manufacturer AUTOELEX

Brand Rcom

PX-R90 Model

MADE IN KOREA Origin

Ranked TOP!!
Credit evaluation in the global incubators market
By FACT. MR, research agency in Ireland

Korean World-class product Award 2011 REPTILE REPTILE Champion of reptile incubators replicates mother nature Evolution of digital incubator! ш шошши

Love of Life begins with Rcom.

We are the R-Com, loving life and nature,

going to do whatever we want and believe."

The Enterprise Loves the Nature, Human, and Life.

with their positive thinking and warmhearted.

Autoelex Co., Ltd., was established in 1991 with our motto "We are certainly

We've expanded our market about 30 ather countries for our R-Com brooders and continued trying to be known in the world as the best brand, based on our high technology and innovative thinking. And we;ve finally became one of the best brooder manufacturing company in the world/

We, RCOM highly expecting our customers' children have a successful life

BRAND INFO

PRODUCT DETAILS

Others

Uromastyx

IDENTIFICATION OF PARTS

Menu Button

Select Button

Select Auto/Manual Pass to next stage

Function Button

INCUBATION MODES

Rcom REPTILE

PRO 90

Other function display, Return to previous stage

Incubation Termination

Select Reptiles

Iguana

GreenPython

Chameleon

Bear.Dragon

Tortoise

Alligator

Gecko

View Window For a clear view of the incubation process, (Double Skin Viewing Window) Serial No. (EX:RCM00000000) If you register your information with your machine is serial number on our web-site Power Connecting (the rear) (www,Rcom,co,kr), you can get 2 year For connecting Egg Tray warranty service. power cord, Reptile Vermi(vermiculite) and reptile Vents for air circulation eggs Loading tray, For circulating warm air Air inlet vent For inlet of air from outside Water hole Digital Control Center To facilitate water top-up See description of for the humidity control, the function and operation, Locking Button Main Body-1 Main Body-2 **FUNCTIONS OF OPERATION**

Rcom PRo **90**

& 21.6 ℃

80 %

8

DIGITAL REPTILE INCUBATOR Automatic Temperature and Humidity Control & Daily Temperature Gap Function

MANUAL button (Selection of reptiles)

MENU button

ENTER button -

UP/DOWN button

(Selection of reptiles)

MENU button UP/DOWN button

("yes" selection)

(incubation termination)

Screen showing

incubation is in progress

21.6 °c

80 %

Temp. and humi. accuracy

Capacity

Weight

Size

Fuse Standard

ENTER button

Chameleon

ENTER button (Auto incubation starts after two seconds)

DOWN

Temp. setting — ① Setting of temp. of

Humi. setting — 2 Setting of humi. of

D.T.G setting

Incubation starts

Screen showing incubation

of other reptiles is in progress

Others

early and middle

early and middle

- ④ D.T.G Temp. setting

±0.5[°C], ±0.9[°F] / ±5[%]

90[eggs] (Different from the species of egg)

4.35[Kg] (N.W.) 5.35[Kg] (G.W.)

(W)633×(L)523×(H)171[mm]

250[V] 2.0[A] (Φ5×20[mm])

stages of incubation

stages of incubation

System finish Are you sure?

Screen showing

completion of incubation

ENTER

MENU

Auto incubation

OTHER(MANUAL)

Incubation termination

21.6 ℃

80 %

(under incubation)

Basic screen before

screen starting incubation

AC 100 ~ 120[V] / 220 ~ 240[V], 50/60[Hz]

(Low)20[°C] / 68[°F] (High)26[°C] / 78.8[°F]

40 ~ 95[%] (It can be changed according to the conditions)

Max. 65[W] (Average 48[W])

Ideal: 22 ~ 25[°C] / 71.6 ~ 77[°F]

20~42[°C]/68~107.6[°F]

(Other reptiles)

incubation

Chameleon

Up Button

Temp. & Humi. UP Setting Value Change

Temp. & Humi, DOWN Setting Value Change

Down Button

Input Button

Save input and Pass to next stage Setting Value Check

SPECIFICATION

Power

Power Consumption

Temp. limits

Working Temperature

Humidity Limits

INTERIOR

Choose a kind

MENU screen

Chameleon

Air circulation fan	Humidity unit	Heater device	Easy access water supply fill hole
		Rcom PRO 90	

Main body

top / bottom

Digital temp. & Temperature / humi, sensor **Humidity Sensor**

Ш

USB Cable

Connecting Socket

11111 (11) 11111

CRAVING OUT A FUTURE

Micro chip with optimum incubation conditions according to the species of reptiles, for incubation

LCD display with incubation information, and animation graphic design

Optimum air circulation technique with 3 high reliability BLDC fans

No need of separate humidification unit as it included in main body

Easy attachment and detachment of double—glazed viewing window

Self-examination function for sensing abnormal conditions

Safety cover applied for protecting humidification unit

Heater supporter designed for heater tension control and its safety

Centigrade and Fahrenheit changing function.

Tray for incubation for exclusive use by reptile

Bottom body designed for easy cleaning

Double insulated window for easy viewing

DIGITAL REPTILE INCUBATOR

FND display



Vermiculite

for reptile incubation

Automatic Temp, & Humidity setting and control Body locking device Water supplement alarm function Antiblastic Humidification method by heating water, which discourages bacterial growth Double-glazed view window for minimizing the influence of outside temperature Enhanced reliability by applying Swiss's Sensirion's 3rd generation tempe rature & humidity sensor Powerful SMPS application for stable power supply The function of diurnal range (D.T.G) Daily temperature range function means as follows: It is a function artificially making the highest time zone of temperature by sun at the natural condition, and it is a function that can raise the incubation success rate of reptile by the optimal incubation environment by raising temperature at the fixed time zone,

EASY FUNCTIONS

Body locking device

SAFETY FUNCTION

ambient temperature

* CAUTION *

Manual setting Mode for incubation specialists

Superior design with convenient operation

MAIN FUNCTIONS

beginners

Humidification unit durability improved by water proof BLDC fan Alarm function when water needs replenishing Antiblastic Humidification method by heating water, which discourages bacterial growth

Alarm and display function of abnormal incubator temperature caused by sudden fluctuation of

Incubation data memory function and power outage notification function in case of power failure

Circulation fan cover for safety and electric safety cut—out switch on the upper main body for safety


it can cause failure of machine, in this case, we do not provide free of charge warranty service but charge it.

After hatching, please clean it up, other wise scale can be formed in the water tank and

We recommend use distilled water not forming scale in the water tank.

If you want to use other one, please contact to purchase shop.

- Use distilled water Use with tap water Above picture shows after test on brooder and every other incubators show same.
 - adversely for nest hatching.
- After hatching, please put chicks in to Brooder immediately.

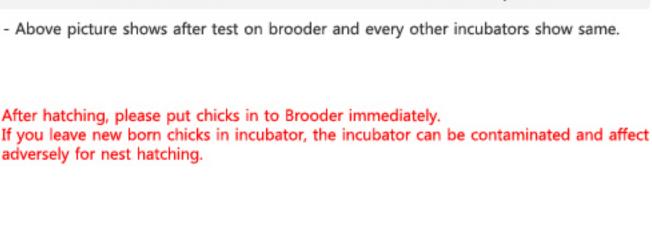



International Organization for **Standardization**



AUTHORISED DISTRIBUTOR



● OFFICE : 1066, Civil Lines, Station Road

Jhansi, U.P-284001, INDIA

● Contact :+91-9559777053

● E-MAIL : thepetsnation@gmail.com

info@petsnation.in

Website : www.petsnation.in

CLICK ON DISTRIBUTOR TO CONTACT ON WHATSAPP